

BARNs 32' - 50' WIDE

STATES: AR, OK, MO, NE, IL, IN, IA, KS

NON CERTIFIED



Boxed Eave Style

10' 12' 10'	12' 12' 12'	12' 18' 12'	12' 20' 12'	12' 22' 12'	12' 24' 12'	12' 26' 12'
<u>32X20X12</u>	<u>36X20X12</u>	<u>42X20X12</u>	<u>44X20X12</u>	<u>46X20X12</u>	<u>48X20X12</u>	<u>50X20X12</u>
\$5,346	\$5,916	\$6,266	\$6,491	\$6,866	\$7,061	\$8,521
<u>32X25X12</u>	<u>36X25X12</u>	<u>42X25X12</u>	<u>44X25X12</u>	<u>46X25X12</u>	<u>48X25X12</u>	<u>50X25X12</u>
\$6,382	\$7,002	\$7,402	\$7,652	\$8,077	\$8,272	\$10,402
<u>32X30X12</u>	<u>36X30X12</u>	<u>42X30X12</u>	<u>44X30X12</u>	<u>46X30X12</u>	<u>48X30X12</u>	<u>50X30X12</u>
\$7,466	\$8,121	\$8,566	\$8,846	\$9,296	\$9,501	\$11,751
<u>32X35X12</u>	<u>36X35X12</u>	<u>42X35X12</u>	<u>44X35X12</u>	<u>46X35X12</u>	<u>48X35X12</u>	<u>50X35X12</u>
\$8,512	\$9,242	\$9,742	\$10,032	\$10,562	\$10,762	\$13,652
<u>32X40X12</u>	<u>36X40X12</u>	<u>42X40X12</u>	<u>44X40X12</u>	<u>46X40X12</u>	<u>48X40X12</u>	<u>50X40X12</u>
\$9,639	\$10,449	\$10,989	\$11,329	\$11,934	\$12,139	\$15,039

NOTE: BASE RAIL FRAME LENGTH'S ARE 20', 25', 30' ETC.

BOXED EAVE STYLE HAS 6" ROOF OVERHANG ON FRONT, BACK AND SIDE EAVES.

STANDARD FEATURES:

14 Gauge frame, 6ft Std legs, 29 Gauge roofing, maximum rafter/ column spacing 5' on center or less, braces on all center rafters and on top corner posts, 4 ft welded trusses on 22'-24' wide carports. 16ft welded peak truss on center buildings 26' wide Single leg system for buildings 6'-12' tall, double leg system for building 13'-16' ft tall legs.



Customer must supply lull lift for buildings 13'-16' tall leg height.



- Free Installation On Your Level Lot
- Engineer Plans Available Call 877-494-2997
- Financing Available / Rent To Own Available
- Rebar Anchors Included /Concrete Anchors Included

LEG HEIGHT CHART

	20'L	25'L	30'L	35'L	40'L
9'-13'*-9'	\$1,535	\$1,870	\$2,193	\$2,527	\$2,850
10'-14'*-10'	\$1,785	\$2,140	\$2,483	\$2,835	\$3,144
11'-15'*-11'	\$2,035	\$2,415	\$2,771	\$3,142	\$3,480
12'-16'*-12'	\$2,285	\$2,683	\$3,061	\$3,451	\$3,810

*DOUBLE LEG AND BASE RAIL SYSTEM HEIGHTS 13FT-16FT

CLOSE BOTH SIDES CHART

	20'L	25'L	30'L	35'L	40'L
8FT	\$810	\$970	\$1,140	\$1,320	\$1,510
9FT	\$940	\$1,110	\$1,290	\$1,480	\$1,680
10FT	\$1,070	\$1,250	\$1,440	\$1,640	\$1,850
11FT	\$1,200	\$1,390	\$1,590	\$1,800	\$2,020
12FT	\$1,330	\$1,530	\$1,740	\$1,960	\$2,190
13FT	\$1,460	\$1,670	\$1,890	\$2,120	\$2,360
14FT	\$1,590	\$1,810	\$2,040	\$2,280	\$2,530
15FT	\$1,720	\$1,950	\$2,190	\$2,440	\$2,700
16FT	\$1,850	\$2,090	\$2,340	\$2,600	\$2,870

ADD 60% FOR VERTICAL SIDES

REFLECTIVE INSULATION (BOTH SIDES) ADD ON:

Multiply leg height by length by 2.

EX. 21' long x 8' tall 8x21= 168 sf x 2 =336 sf x 2.50
= \$840.00 both sides

CLOSE ONE END CHART

	10'-12'W	18'W	20'W	22'W	24'W	26'W
8FT	\$750	\$916	\$980	\$1,075	\$1,243	\$1,430
9FT	\$850	\$1,015	\$1,080	\$1,175	\$1,343	\$1,545
10FT	\$950	\$1,116	\$1,180	\$1,275	\$1,443	\$1,660
11FT	\$1,050	\$1,216	\$1,280	\$1,375	\$1,543	\$1,775
12FT	\$1,150	\$1,316	\$1,380	\$1,475	\$1,643	\$1,890
13FT	\$1,300	\$1,466	\$1,530	\$1,625	\$1,793	\$2,005
14FT	\$1,400	\$1,566	\$1,630	\$1,725	\$1,893	\$2,120
15FT	\$1,500	\$1,666	\$1,760	\$1,825	\$1,993	\$2,235
16FT	\$1,600	\$1,766	\$1,830	\$1,925	\$2,093	\$2,350

ADD 40% FOR VERTICAL ENDS

REFLECTIVE INSULATION (PER END) ADD ON:

Add 3' to leg height multiply by width

EX. 10' wide x 8' tall 11x10= 110 sf x 2.50
= \$275.00 per end

VERTICAL ROOF ADD ON

VERTICAL ROOF HAS NO OVERHANG ON FRONT OR BACK JUST ON SIDE EAVES.

	20'L	25'L	30'L	35'L	40'L
32'W	\$1,450	\$1,850	\$2,250	\$2,650	\$3,050
36'W	\$1,650	\$2,050	\$2,450	\$2,850	\$3,250
42'W	\$1,850	\$2,250	\$2,650	\$3,050	\$3,450
44'W	\$2,050	\$2,450	\$2,850	\$3,250	\$3,650
46'W	\$2,250	\$2,650	\$3,050	\$3,450	\$3,850
48'W	\$2,450	\$2,850	\$3,250	\$3,650	\$4,050
50'W	\$2,650	\$3,050	\$3,450	\$3,850	\$4,250

REFLECTIVE INSULATION (PER END) ADD ON:

Add 3' to leg height multiply by width

EX. 12' wide x 6' tall 9x12= 108 sf x 2.50
= \$270.00 per end

"ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE"

©2024 Copyright All Rights Reserved Tri State Carports, Inc

2024 V3

OPEN BARNES 32'-50' WIDE OPTIONS

		20'L	25'L	30'L	35'L	40'L
12 GAUGE FRAME UPGRADE	32'W-44'W	\$1,375	\$1,530	\$1,680	\$1,840	\$1,990
	46'W-48'W	\$1,375	\$1,530	\$1,680	\$1,840	\$1,990
	50'W	\$1,700	\$1,910	\$2,110	\$2,330	\$2,530
3FT BRACES		\$72	\$86	\$101	\$115	\$130
MOBILE HOME ANCHORS		\$270	\$270	\$360	\$360	\$450
Labor Fees		20'L	25'L	30'L	35'L	40'L
Build over fee		\$250	\$300	\$350	\$400	\$450
Cut leg fee		\$275	\$325	\$375	\$425	\$475

3' brace upgrade recommended for buildings 8' and higher. Extra support recommended for buildings 10'-12' Tall Legs to prevent swaying.

***30 Day Workmanship warranty** on all Buildings, effective day of Installation.
***20 Year limited warranty** on 12 Gauge framing materials assuming regular care and maintenance given to building.

We strongly recommend you to purchase vertical roofs on buildings 31ft or longer to prevent leaks.

Add \$100.00 Trip Fee on any purchase less than \$500.00

Connection fees valid only if you are purchasing 2 buildings at the same time (not on existing buildings)


Connecting end to end. \$300.00
 Connecting side to side. \$150.00

CONCRETE DIMENSIONS

In reference to frame size
Ex. 12'Wx20'L building frame size. Make pad 12'8"Wx20'8"L.
 Make the extra 4" all around slope away from the building edge to run off water.

ROOF REFLECTIVE INSULATION ADD ON:
 Add 2' to width and multiply by length. EX. 32' wide x 21' long
 (36x21= 756 sf x rate = \$ 1,890.00) R Value 14.7 **\$2.50 SF**
 95% Reflectivity Helps reduce building condensation

EXTRA FRAME BOW	WELDED TRUSSES	EXTRA BRACES	GARAGE DOORS	*GABLE END
12'-20' WIDE \$252 EA. 22'-24' WIDE \$312 EA. 26' WIDE \$346 EA. ADD \$10.00 FOR EACH ADDITIONAL HEIGHT.	4' LONG \$32.00 EA. 5' LONG \$50.00 EA. 8' LONG \$94.00 EA.	2' LONG \$14.00 EA. 3' LONG \$22.00 EA.	6'WX6'H \$704.00 EA. 8'WX7'H \$848.00 EA. 9'WX7'H \$920.00 EA. 10'WX8'H \$992.00 EA. 10'WX10'H \$1,064.00 EA. 12'WX12'H \$2,304.00 EA.	12'-20' WIDE \$288.00 EA. 22'-24' WIDE \$396.00 EA. 26' WIDE \$432.00 EA.
MOBILE HOME ANCHORS 3/4"X30" \$30.00 EA.	ASPHALT ANCHORS 3/4"X30" \$30.00 EA.	WINDOWS white with grids 24"X36" \$190.00 EA.	10'WX10'H \$1,064.00 EA. 12'WX12'H \$2,304.00 EA.	**EXTENDED GABLE 12'-20' WIDE \$504.00 EA. 22'-24' WIDE \$540.00 EA. 26' WIDE \$792.00 EA.
WALK IN DOOR left outswing 36"X80" \$515.00 EA. ADD \$50.00 SIDE FEE (IF FRAME HEADER BAR IS NEEDED ADD \$100) <u>BUILDING MUST BE A MIN OF 7FT TALL TO INSTALL DOOR ON SIDE.</u>	EXTRA PANELS 36" wide 21' LONG \$130.00 EA. *36' LONG \$216.00 EA. 26' LONG \$158.00 EA. *41' LONG \$259.00 EA. 31' LONG \$187.00 EA. *NOT A CONTINUOUS PANEL.		ADD \$100.00 SIDE DOOR FEE (PER EACH DOOR) <u>BUILDING MUST BE 1' TALLER TO INSTALL DOOR ON SIDE.</u> ELECTRIC DOOR OPENER \$950.00 EACH	**GABLE PLUS 3' PANEL ADD 40% FOR VERTICAL GABLES
EXTRA L TRIM \$1.25 (PER FT)	EXTRA J TRIM \$1.12 (PER FT)	45° TRIM KIT \$99.00 EA. MUST CLOSE END OR SIDE FIRST.	RECOMMENDED 10-12' TALL ON CONCRETE OR GROUND.	EXTRA SUPPORTS \$100.00 EACH

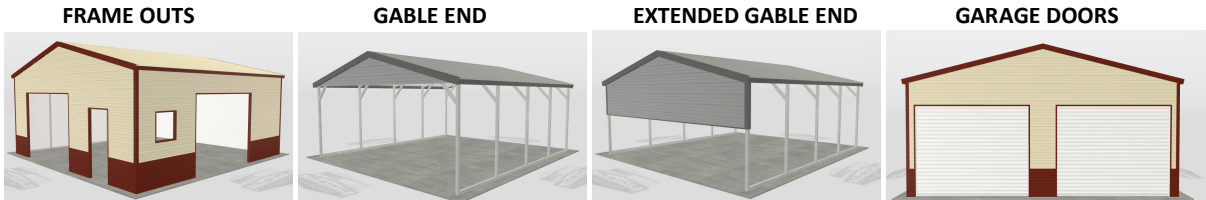

FRAME OUTS	WINDOW \$80.00 EACH	WALK DOOR \$90.00 EACH	DOOR FRAME OUTS	6'W-12'W ON END \$150.00 EACH 13'W-16'W ON END \$300.00 EACH	6'W-12'W ON SIDE \$200.00 EACH 13'W-16'W ON SIDE \$400.00 EACH	ON ENDS: MUST CLOSE FIRST FOR FRAME OUTS, IF NO PANELS WANTED ON END (FRAME END ONLY) <u>DISCOUNT 20% FROM CLOSED END PRICE.</u>
16FT WIDE MAX ON END AND SIDE DOOR OPENINGS						



2 Under Ground